



# Super Silent Pumps

**Canopy manufactured with solid 12 gauge steel** which makes canopy very durable.

**Expanded Metal Lining** to keep 2" insulation securely in place.

**Quiet Running at 67 Decibels** which means pump can barely be heard at 23 feet.

**Lifting frame and Stainless steel hardware**

**Lockable Doors** for damage prevention

**Environmentally Friendly Spill Containment Base** - fuel and oil drip collection at base for proper disposal

**HANS - Holland Automatic Notification System** to keep you in control

**PRIME<sup>3</sup> Priming System** features on PT6 and PT8 pumps include a 50 cfm diaphragm vacuum pump that reprimers when water is only a few inches deep

**Road or Site Trailer** available on some models

**Modular construction for repairability**

**Automatic with floats or Manual Start and Stop**

**LobePro Equipped** rotary wellpoint pumps feature "proven in the field" LobePro positive displacement rotary pumps

**Super Silent Pumps maintain noise levels at not more than 67 decibels at 23 feet using the rigorous Contractor's Pumps Bureau Test Method.\***


## Models

## Applications

Suction Pump Model	Pump Size	Max Head	Solid Size	Fuel used @ 1,800 rpm (gph)	Max GPM
PT4TMS-SA	4"	120'	3"	1.25	780
PT6TPA-SA	6"	140'	3"	1.45	1,300
PT8TPA-SA	8"	135'	3"	1.7	2,600
PT8TPC-SA	8"	200'	3"	2.5	2,600
PT10TPC-SA	10"	255'	3.38"	7.6	4,200
PT14TPB- SA	14"	200'	3"	8.8	8,500
PT18TPD- SA	18"	240'	4.5"	15.75	16,000
Wellpoint Pump Model	Pump Size	Max Head	Solid Size	Fuel used @ 1,800 rpm (gph)	Max GPM
W6R-SA	6"	57'	1.5"	.45	500
W8R-SA	8"	57'	2.5"	0.8	1,300
W12R-SA	12"	57'	2.5"	1.6	2,600

Minimize neighborhood complaints and meet municipal requirements with a Super Silent pump. Featuring indefinite dry run capabilities, automatic self-priming, optional self start and DOT trailers, Super Silent Pumps maintain noise levels at not more than 67 decibels at 23 feet using the rigorous *Contractor's Pumps Bureau Test Method*.\* Super Silent suction lift sewer bypass models are available at Holland Pump in four inch, six inch, and eight inch sizes to accommodate a wide range of applications. W6R, W8R and W12R Super Silent Rotary Wellpoint Pumps feature valve assisted pressure regulation for sock applications.

\*Contractors Pump Bureau Method - Pump placed in middle of concrete paved area. Sound level checked from all four corners and the middle of each side from 23 feet while pump is operating at full speed and then averaged.

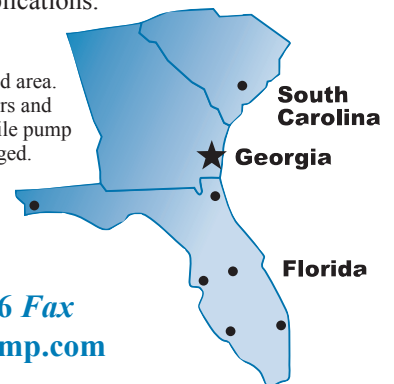

**2610 Sidney Lanier Drive • Brunswick, Georgia 31525**  
**1-888-997-PUMP Toll Free • (912) 466-0304 Telephone • (912) 466-0086 Fax**  
**For a list of branch locations and online part sales visit: [www.hollandpump.com](http://www.hollandpump.com)**

**Manufacturer • Sales • Rentals • Service**